

Join our photo contest now! T&C Apply More info: suzuka.com.my/promotion











SUZUKA.COM.MY SUZUKA.group | Hotline : +6012-3595

TAIWAN . MALAYSIA . THAILAND



112020

TEXTURE COATING EDITION 1



en

LFIN

architects choic SINCE 19

POFESSIONP



SUZUKA® TEXTURE COATING






MAGIC GRANITE

With the multi-tone combination of brilliant inorganic mineral flakes, a natural and coarse, yet exquisite granite look is created.

PACKING DATA




COVERAGE : 5-6m²



MGM-301

MGM-322



MGM-321



MGM-303



MGM-315




MGM-308





SUZUKA® MAGIC GRANITE











MGM-323



MGM-324



MGM-317



MGM-307



STONY COAT

Using a combination of color sands, SUZUKA® Stony Coat crafts the authentic effects of natural stones. Its granular surface gives the wall a bold and prominent finish.


PACKING DATA




COVERAGE : 5-6m²



NSC-610



NSC-609





NSC-623




NSC-619

SUZUKA® STONY COAT







NSC-608



NSC-620




NSC-621



 \bigcirc

NSC-614

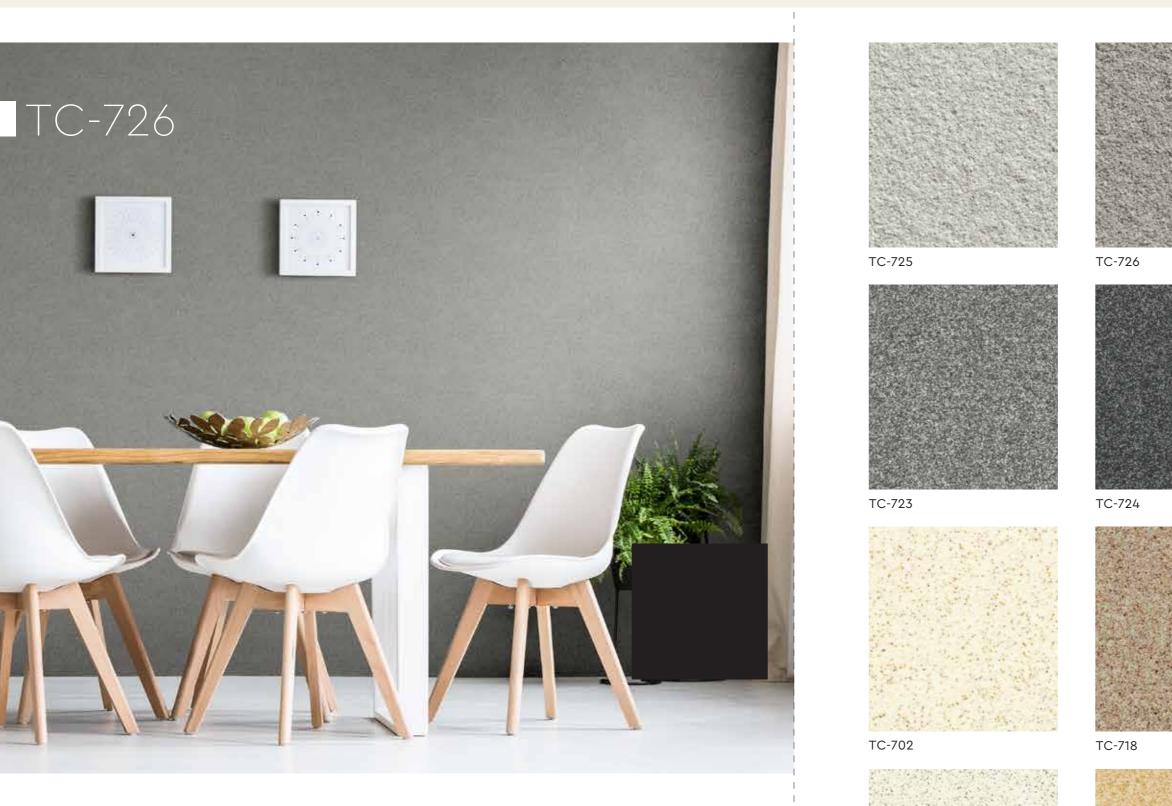

CERAMIC COAT

The blend of fine grandeur color sands forms a suave and refined texture, giving the walls an elegant and graceful outlook.

PACKING DATA



COVERAGE : 7-8m²

TC-711

TC-701

SUZUKA® CERAMIC COAT









TC-722



TC-727



TC-721





THE DIFFERENCE BETWEEN


MAGIC GRANITE



• Rougher surface · With mineral flakes, it brings minor reflective effects, to create extraordinary looks.

STONY COAT

· Rough surface \cdot With natural stone, to create natural stone look effect.



 \cdot Sandy surface · Create fine and simple looks.

TOOLS: SUZUKA® SPRAY GUY



· Consistent spray pressure · Easy maintenance

FEATURES AND BENEFITS

- · Easy to clean
- · Easy to control
- · Exchangeable nozzle
- · No replacement parts required · Made in Taiwan

Δ3



Accessories :



MATERIAL NOZZLE

M2

X 3PCS

M1

Suitable for :	-	NSC	MGM/TC	тс	NSC	MGM
Nozzle diameter	1.5mm	2.0mm	2.5mm	5.0mm	6.5mm	8.0mm
Nozzle code	A1	A2	A3	M1	M2	M3

Λ1

Δ2

X 3PCS

TEXTURE COATING PACKING & CONSUMPTION

	Process	Product Code	Dilution	Packing	Number Of Coats	Coating Interval (Hrs)	Consumption	Coverage /Drum	Application Tools	
1	Surface Preparation	Surface shall be dry and free form dirt, oil, grease and other contaminants. All cracks or defective substrate shall be repaired with suitable cement filler.								
2	PRIMER		Max 5% with	1 L	1	3	7 - 9 m²/l	7 - 9 m²	Roller or Brush	
		2.111	clean water	18 L			7 7 11 7 1	126 - 162 m ²		
		MGM	Max 5% with clean water	25 KG	1 - 2	24	4.2 – 5.0 kg/m²	5 - 6 m²	Spray Gun Nozzle (8mm)	
3	TEXTURE COAT	NSC	Max 5% with clean water	25 KG	1 - 2	24	4.2 – 5.0 kg/m²	5 - 6 m²	Spray Gun Nozzle (6.5mm)	
		ТС	Max 5% with clean water	25 KG	1 - 2	24	3.0 - 3.6 kg/m²	7 - 8 m²	Spray Gun Nozzle (5mm)	
4	TOP COAT	PCOAT FSI FSI	FSI Clear	1 L	1 - 2	-	8 - 10 m²/l/coat	8 - 10 m²	Roller or Brush	
	TOT COAT			15 L				120 - 150 m ²		
N	lo Primer Co 1 EMP Whit		Color Codes EMP-01-WH		Primer Colo EMP Light R			ner Color ? Light Grey	Color Codes EMP-07-LG	

No	Primer Color	Color Codes	No	Pri
1	EMP White	EMP-01-WH	4	ΕM
2	EMP Light Yellow	EMP-02-LY	5	ΕM
3	EMP Dark Yellow	EMP-03-DY	6	EM

FEATURES & BENEFITS FOR SUZUKA® PRIMER (EMP)

- Protects against alkaline and efflorescence.
- Excellent adhesion on masonry substrate.
- Water based, non-hazardous, low odor, non-toxic, formaldehyde and heavy metal free.



1P Dark Red EMP-05-DR

- 1P Dark Brown EMP-06-DB
- 8 EMP Dark Grey EMP-08-DG

- **FEATURES & BENEFITS FOR** SUZUKA® TOP COAT (FSI CLEAR)
- Protects against weather and ultraviolet damage.
- Provides dirt and stain resistance.
- Protects against fungus and algae growth.
- Low sheen and preserves original color.
- Water based, low odor, non-hazardous, non-toxic, formaldehyde and heavy metal free.
- Easy to apply prevents uneven appearance when dried.