

WALL FINISH ROFESSIONALS

ALAYSIA . THAILAND



BRICK & STONE VENEER . TEXTURED PAINTS . KASTPANEL . ECES . TEXTURE COATING . PEBBLE STONE COATING



suzuka.com.my **o** f suzuka.group Hotline: +6012 - 260 3026



* Photos of the products shown in the brochure are based on the scale of 1:12

May vary in color due to lighting condition and printing.

We suggest you examine actual product samples before ordering.







ST-E04-2006



ALL FINIST

- archilects choice SINCE 1977

POFESSIONA





Strateo? CEMENT TEXTURE

Create everlasting look with Strato® Cement Texture.

Whether you are going for the industrial, scandinavian, contemporary or minimalistic style, the backdrop of the cement texture can complete the look.



Features

Crack Resistant



Low VOC & Odor



Formaldehyde & Lead Free

Anti-chalking & Efflorescence



Green Choice, Water Based & Eco-friendly



Easy, Quick Application & DIY Friendly



Applicable on Ceiling



Easy Maintenance



Easy to Touch Up




Matte Finishing

• INTERIOR USE ONLY
For exterior options, please see MONOKRETE.





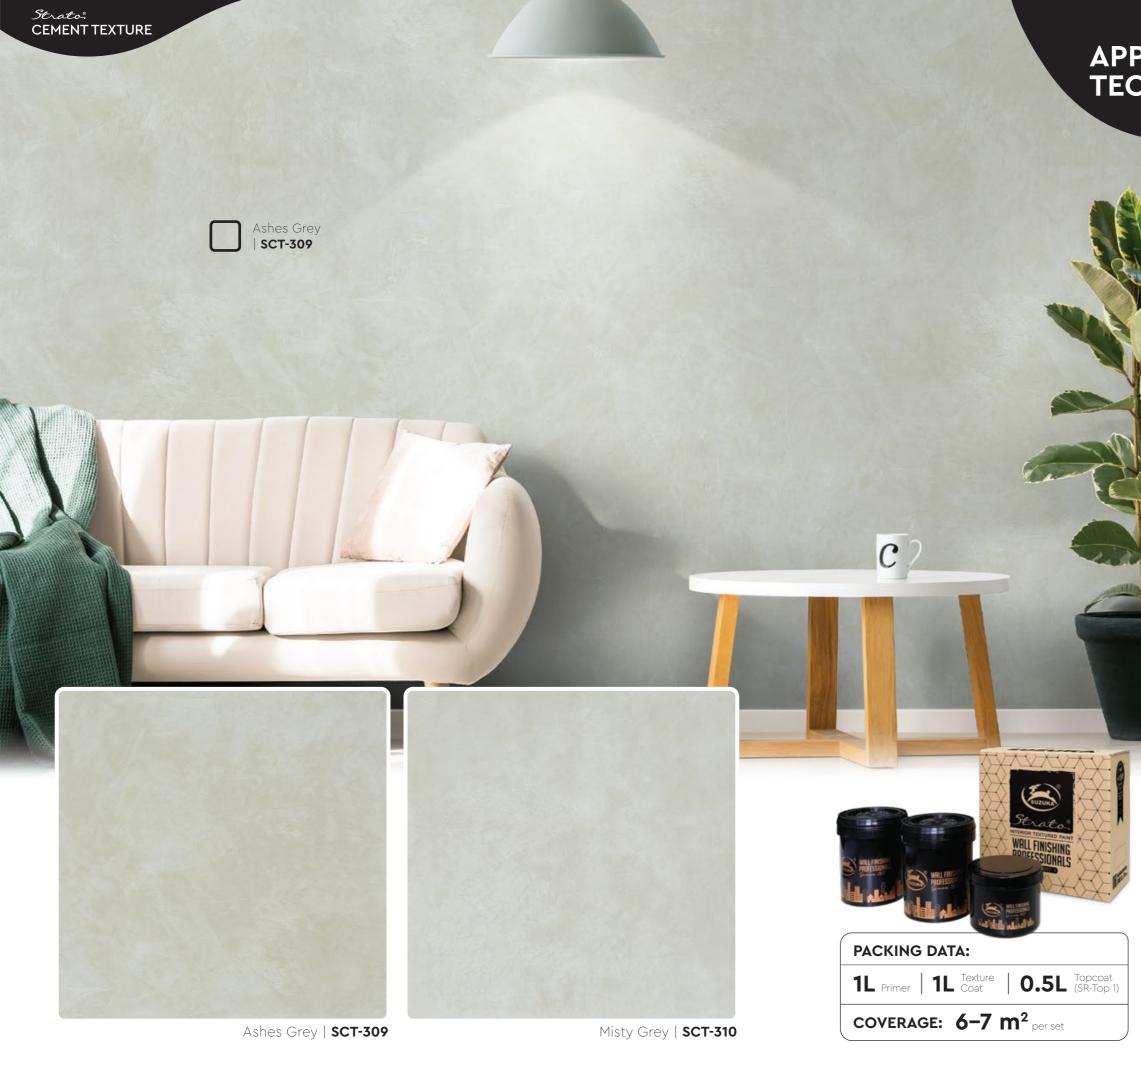

APPLICATION TECHNIQUE



Primer

Roll 2 layers of Strato* Primer on the entire surface. Allow 30 minutes to dry between the layers.

Tool: Roller

(The primer can be diluted with maximum 5% of clean water)



Sanding

Sand the entire surface in circular motion to ensure the surface is smooth.

Tool: 600 Grit Sand Paper



3 Texture Coat

Scrape Strato® Cement Texture Coat randomly to create pattern. Ensure the whole surface area is covered. Then apply second layer.

Tool: Stainless Steel Trowel

(use a larger trowel for a larger pattern, a smaller trowel for smaller pattern)



Sanding (OPTIONAL)

Sand the entire surface in circular motion to enhance the pattern.

Tool: 600 Grit Sand Paper



Topcoat

Apply SR-Top 1 on entire surface using a dry sponge in circular motions.

IMPORTANT: Use a clean and dry sponge or cleaning cloth to wipe the excess topcoat before it dries to avoid the sponge marks.

Tool: Sponge / Cleaning Cloth

IMPORTANT: Color may vary on application technique & amount of material used.





Sand Paper (600 Grit)





All color shown are as close to the actual SUZUKA® Strato® colors as modern printing techniques permit.

Color appearance/finishing may vary according to amount of coats, style of strokes applied and individual painting methods.



Strato. VELOURS

Rich velvety layers of color to enhance the interior space. Each color brings out a different mood & ambience, find a color that matches your personality.

• INTERIOR USE ONLY For exterior options, please see MONOKRETE.



Low VOC & Odor



Formaldehyde & Lead Free

Anti-chalking & Efflorescence



Green Choice, Water Based & Eco-friendly



Easy, Quick Application & DIY Friendly



Applicable on Ceiling



Easy Maintenance




Easy to Touch Up



Matte Finishing





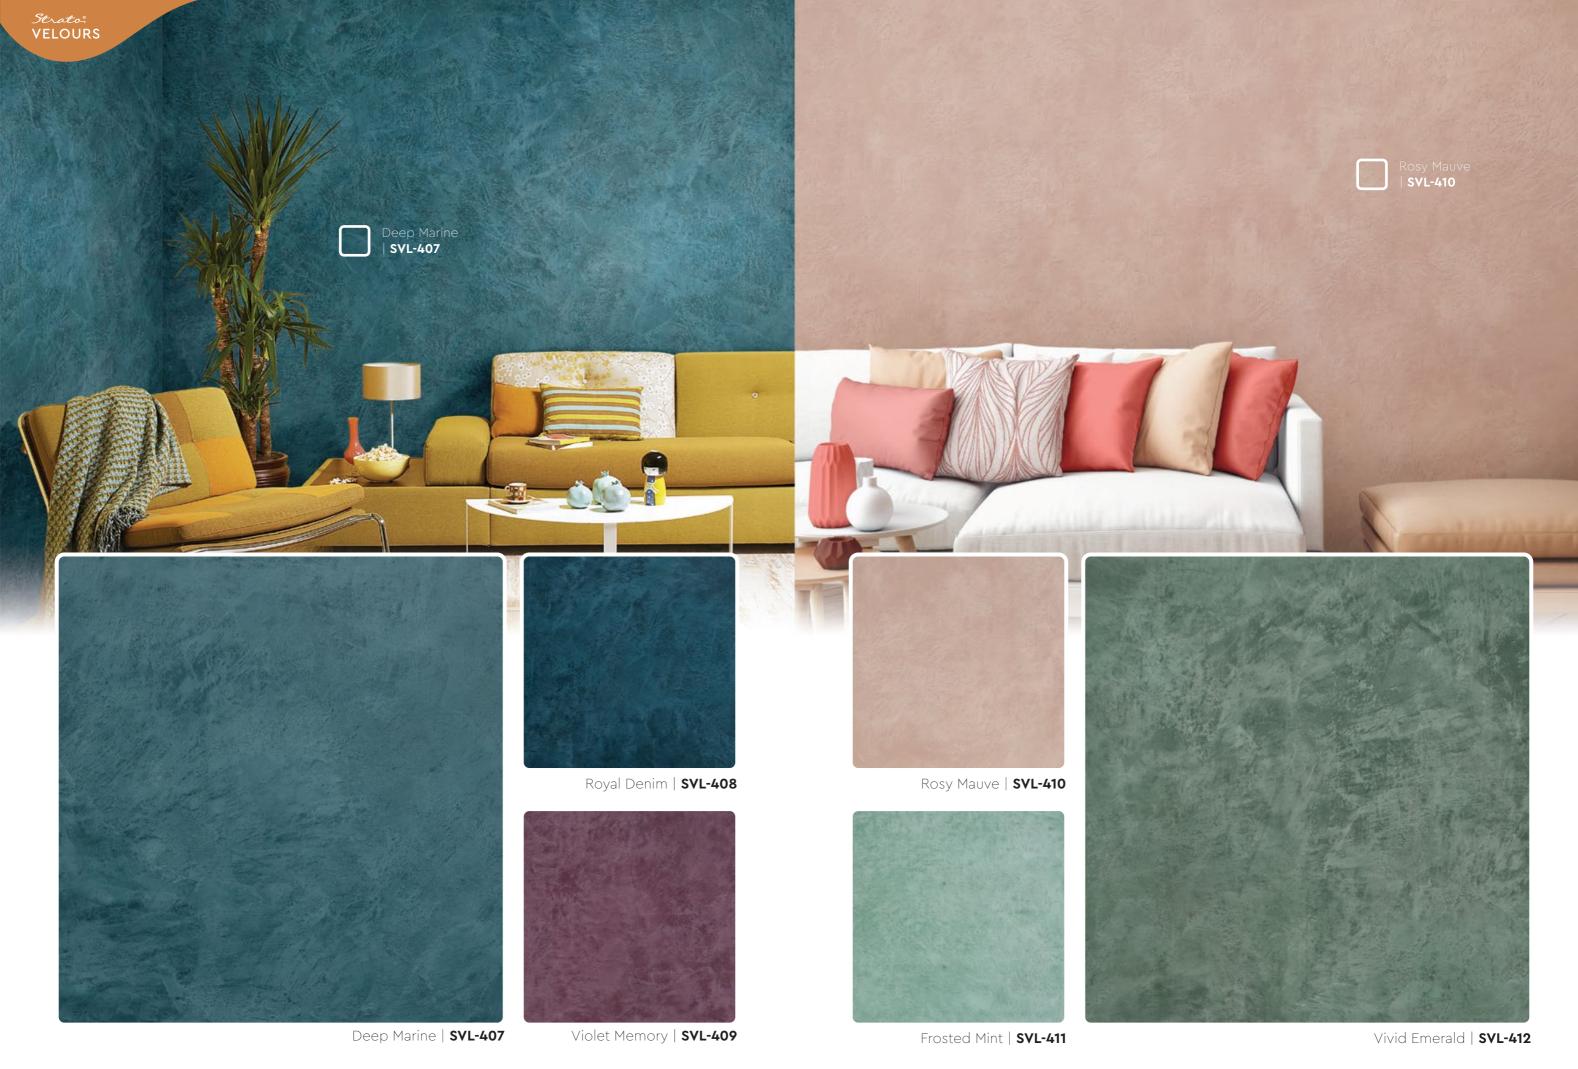

VELOURS SVL-413

Hunter Green | SVL-413



Lime Mist | SVL-415

Flamingo Blush | SVL-416

Herbal Garden | SVL-414

APPLICATION TECHNIQUE





Priner

Roll 2 layers of Strato* Primer on the entire surface. Allow 30 minutes to dry between the layers.

(The primer can be diluted with maximum 5% of clean water)



Sanding

Sand the entire surface in circular motion to ensure the surface is smooth.

Tool: 600 Grit Sand Paper



Texture Coat

Scrape Strato® Velours Texture Coat randomly to create pattern. Ensure the whole surface area is covered. Then apply second layer.

Tool: Stainless Steel Trowel

(use a larger trowel for a larger pattern a smaller trowel for smaller pattern)



Sanding (OPTIONAL)

Sand the entire surface in circular motion to enhance the pattern.

Tool: 600 Grit Sand Paper



opcoat

Apply SR-Top 1 on entire surface using a dry sponge in circular motions. **IMPORTANT:** Use a clean and dry sponge or cleaning cloth to wipe the excess topcoat before it dries to avoid the sponge marks.

Tool: Sponge / Cleaning Cloth

IMPORTANT: Color may vary on application technique & amount of material used.





Sand Paper (600 Grit)





PACKING DATA:

1L Primer | 1L Texture | 0.5L Topcoat (SR-Top 1)

COVERAGE: 6-7 m² per set



Strato. Cashmere

Strato® Cashmere embodies the pinnacle of elegance in textured coating. Achieved through smooth layering and delicate craftsmanship, the finished product gives a refined and royal appearance with a lingering hint of sophistication.

Features

Low VOC & Odor



Formaldehyde & Lead Free



Green Choice, Water Based & Eco-friendly



Easy, Quick Application & DIY Friendly




Easy Maintenance



• INTERIOR ONLY

17

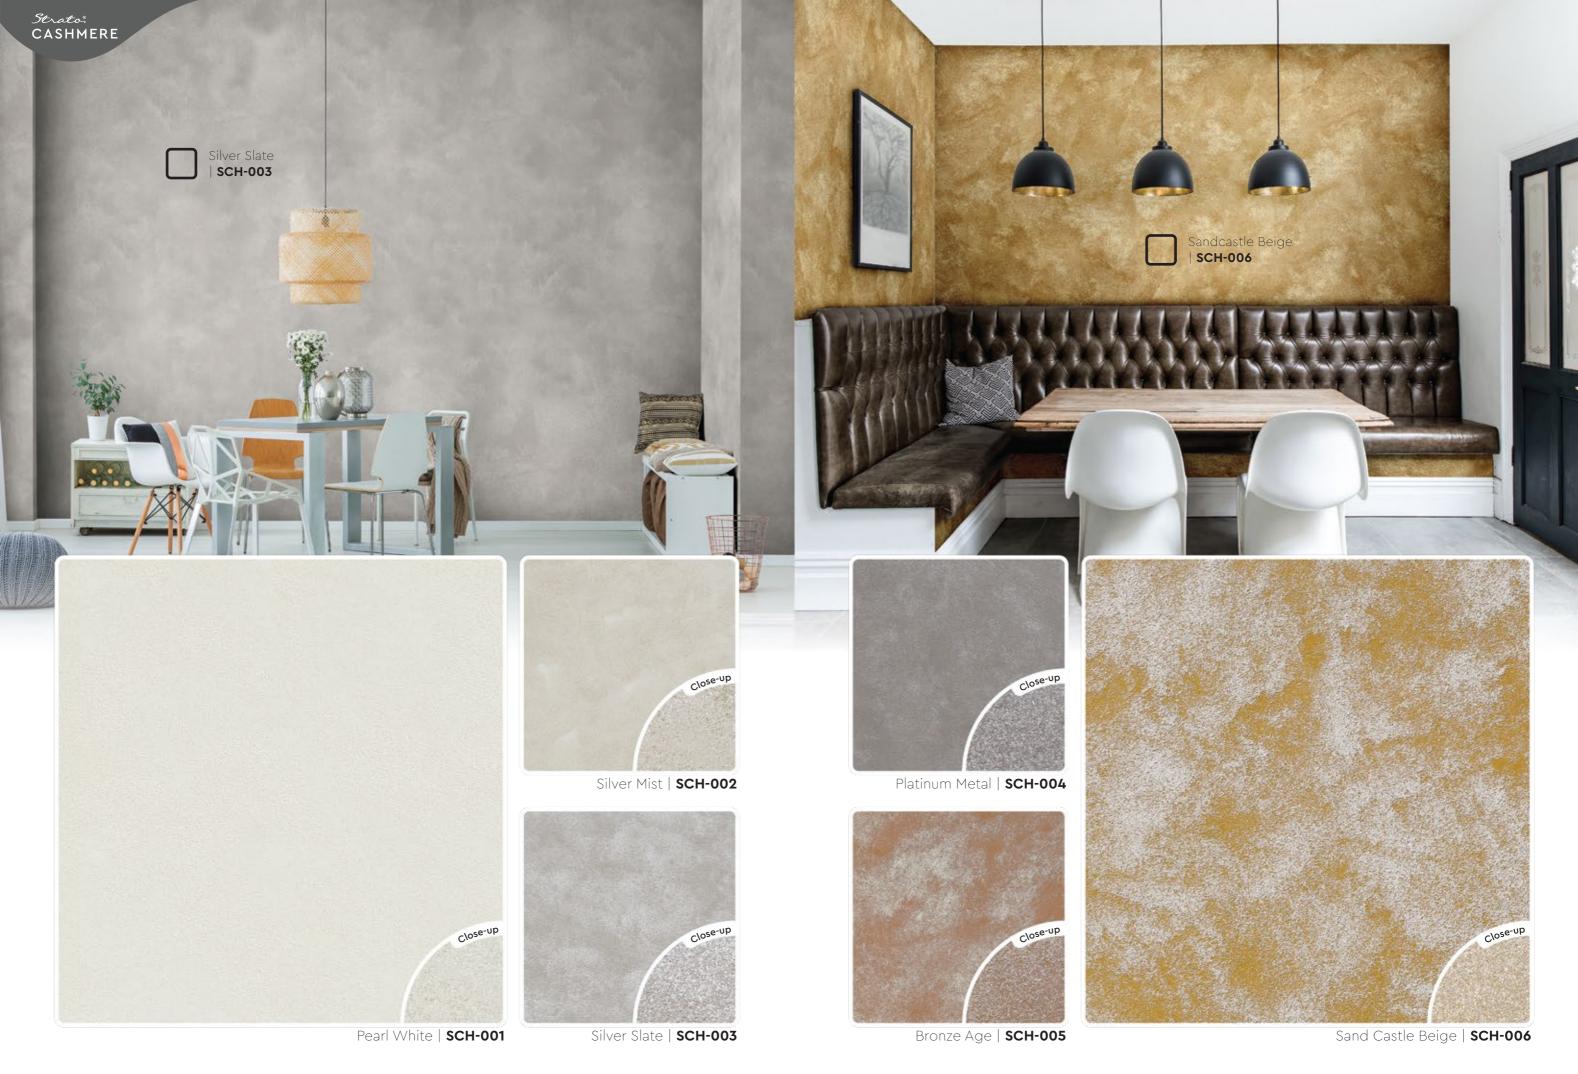



APPLICATION TECHNIQUE





Priner

Roll 2 layers of Strato® Primer on the entire surface. Allow 30 minutes to dry between the layers.

Tool: Roller

(The primer can be diluted with maximum 5% of clean water)



Texture Coat

cross patterns. Apply 1–2 layers. Ensure the whole surface area is covered.

Tool: Brush



Flatten

Flatten the entire surface in circular motion to enhance the pattern.

Tool: Plastic Spatula



Topcoat

Evenly roll SR-Top 3 on entire surface. Allow to dry for 1 hour.

Tool: Roller



Stardust Silver | **SCH-016**

Peacock Blue | SCH-019

Close-up

CASHMERE




Ash Grey

SCH-018

Olive Tree | SCH-020

Lace Blue | SCH-017

C/ose-up



Ash Grey | SCH-018

Tropical Green | SCH-021



PACKING DATA:

1L Primer | 1L Texture Coat | 1L Topcoat (SR-Top 3)

COVERAGE: 6 - 7 m² per set





Strato: taffeta

A vibrant color layered in texture and dusted with a shimmering pearl effect crafts a bold and radiant feel onto the wall.

Features

Low VOC & Odo



Formaldehyde & Lead Free



Green Choice, Water Based & Eco-friendly



Easy, Quick Application & DIY Friendly



Easy Maintenance



• INTERIOR ONLY

25









Roll 2 layers of Strato* Primer on the entire surface. Allow 30 minutes to dry between the layers.

Tool: Roller

(The primer can be diluted with maximum 5% of clean water)



Sanding (OPTIONAL)

Sand the entire surface in circular motion to ensure the surface is smooth.

Tool: 600 Grit Sand Paper



Texture Coat

Scrape Strato® Taffeta Texture Coat in a random criss cross pattern. 2–3 layers. Every layer requires 30 minutes to dry.

Tool: Steel Spatula



Sanding

Sand the entire surface in circular motion to enhance the pattern

Tool: 600 Grit Sand Paper



Topcoat

Scrape on Strato® Topcoat SR-Top 2 in a random criss cross overlapping patterns. Allow 1 hour to dry

Tool: Steel Spatula

Taffeta has a **shimmering** pearl effect topcoat. For a matte finishing, please request SR-Top 1.

Tools:





