

*Cnap & Win!*  
**iPad Pro**  
 Check out our contest!  
[suzuka.com.my/promotion](http://suzuka.com.my/promotion) | T&C Apply



# STRATO METALLICS MERINO & ORGANZA

EDITION  
**2.2**

*Metallics*

INTERIOR  
 TEXTURED PAINTS

- Complies to the
- American California Proposition 65 Standard.
  - LEED, U.S. Green Building Council Standard.



WALL FINISH  
 PROFESSIONALS.

SINCE  
 1977

*Free*  
**Product  
 Training**

For All Industry  
 Professionals

[suzuka.com.my/career-training](http://suzuka.com.my/career-training)

## WALL FINISH PROFESSIONALS



**suzuka.com.my**

f o d suzuka.group | Hotline : +6012-258 7388



Photos of the products shown may vary in color due to lighting condition & printing.  
 We suggest you examine actual product samples before ordering.



STRATO METALLICS-E2.2-2509

# STRATO<sup>®</sup>

## Metallics

1

### STRATO<sup>®</sup> MERINO

Page 3 – 10

2

### STRATO<sup>®</sup> ORGANZA

Page 11 – 18

## SUZUKA<sup>®</sup> WALL SEALER PRO

“ Make your  
wall finishes  
last longer! ”



Packing Size: **1L** **5L** **20L**

### Superior primer for concrete, skimmed or masonry surfaces.

This sealer that has good substrate penetration abilities to increase adhesion of product to prevent chalking or peeling off.

It has excellent alkaline resistance properties that can prevent efflorescence. It is an ideal base coat for any SUZUKA<sup>®</sup> or any wall finish products.

| Coverage                                   | Drying Time (hour)     |                        |
|--------------------------------------------|------------------------|------------------------|
| <b>6.5 - 8.5</b><br>m <sup>2</sup> /l/coat | Surface Dry : <b>1</b> | Substrate Temperature: |
|                                            | Hard Dry : <b>5</b>    | <b>23°C - 26°C</b>     |
|                                            | Recoating : <b>5</b>   |                        |

#### Features:

- Excellent alkaline resistance to prevent efflorescence.
- Good for new walls and repainting.
- Prevents skim coat from chalking & peeling off.
- Extremely good penetration.
- Excellent adhesion.
- Exterior and interior use.
- Applicable with brush, roller or spray gun.

#### Suitable for:

- Masonry wall
- Brickwork
- Plaster
- Skimmed Coat
- Asbestos free substrate

| Airless Spray       |                    |                                     |
|---------------------|--------------------|-------------------------------------|
| Nozzle              | Spray Angle Degree | Pressure                            |
| <b>1.8 - 2.0 mm</b> | <b>65° - 80°</b>   | <b>210 psi/150kg/cm<sup>2</sup></b> |

STRATO® METALLICS

Merino

SMM



SMM 801 – 814

A striking textured metallic pattern that is linen like.  
Strato® Merino not only can suit elegant but also rustic designs.

### Appearance

|                |  |  |  |  |  |               |
|----------------|--|--|--|--|--|---------------|
| Low Sheen      |  |  |  |  |  | High Sheen    |
| Smooth Texture |  |  |  |  |  | Rough Texture |
| Matte          |  |  |  |  |  | Metallic      |

### Features

- Interior use only



Low VOC  
& Odor



Green Choice, Water  
Based & Eco-friendly



Formaldehyde  
& Lead Free



Easy Application  
& DIY Friendly



Applicable  
on Ceiling



Easy to  
Touch Up



Easy  
Maintenance



Metallic  
Finish

Complies to the

- American California Proposition 65
- LEED, U.S. Green Building Council Standards



**SMM-801** Crystal White



**SMM-802** Vanilla White



**SMM-803** Light Beige



**SMM-804** Dewy Rose



**SMM-805** Peach Passion



**SMM-806** Dusty Mauve



**SMM-807** Tippy Taupe



**SMM-808** Dapper Tan




All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tone differences.

**We highly recommend seeing actual samples before ordering.**



**SMM-811** Frost Grey

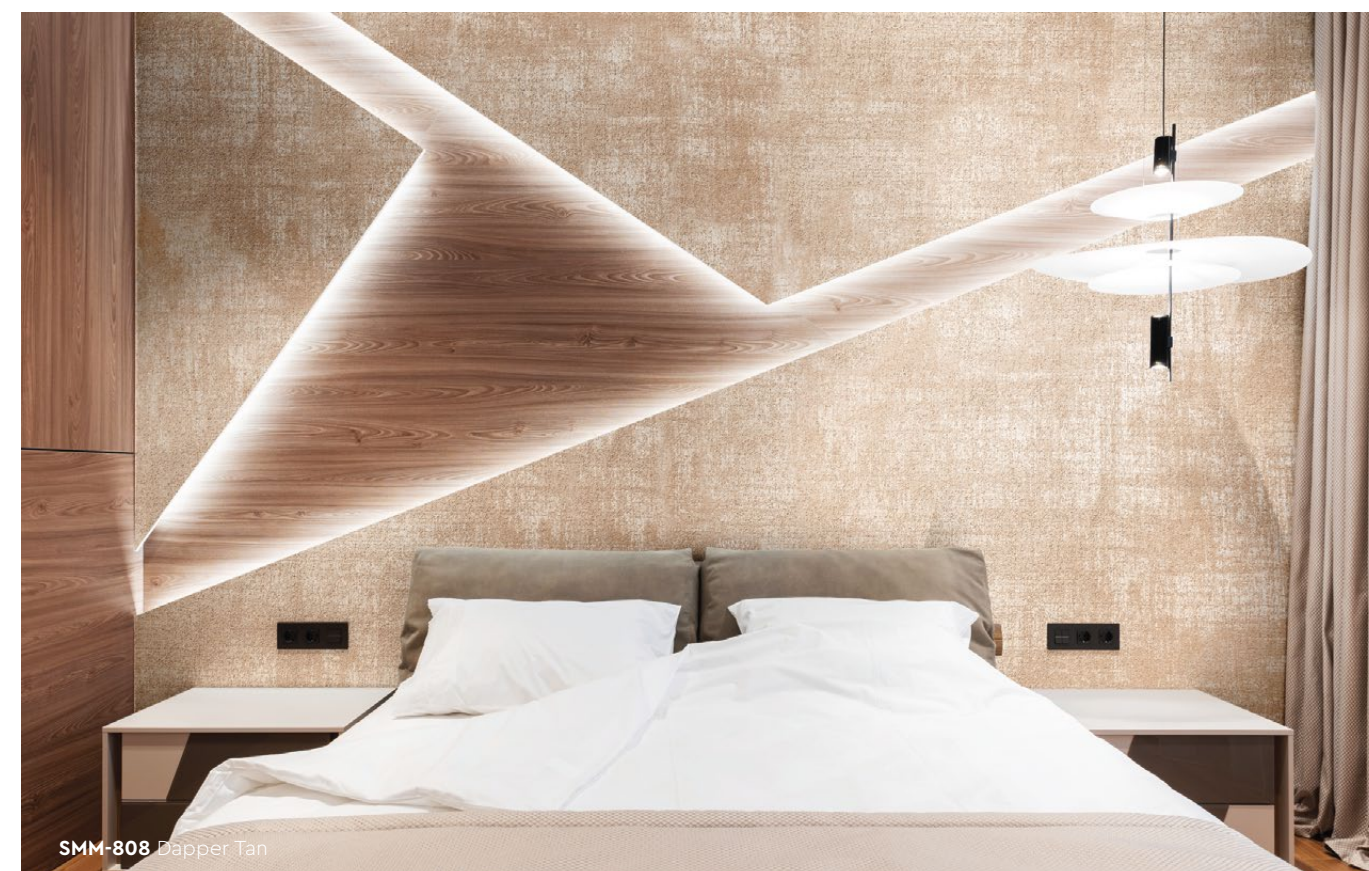

**SMM-808** Dapper Tan



**SMM-811** Frost Grey



**SMM-801** Crystal White



**SMM-810** Lilac Grey



**SMM-805** Peach Passion




All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tone differences.

**We highly recommend seeing actual samples before ordering.**



**SMM-809** Lime Grey

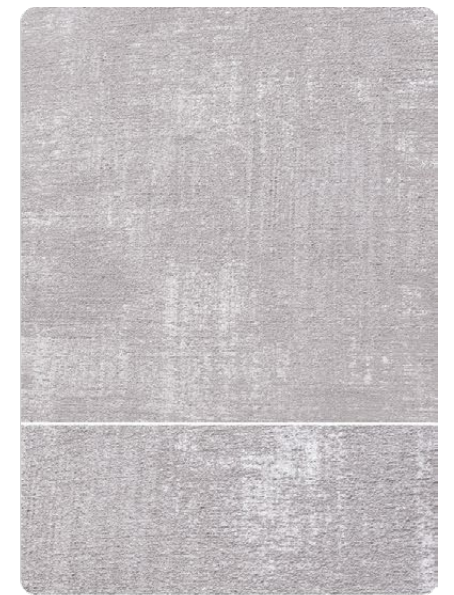

**SMM-810** Lilac Grey




**SMM-811** Frost Grey



**SMM-812** Suede Grey



**SMM-813** Rocky Grey

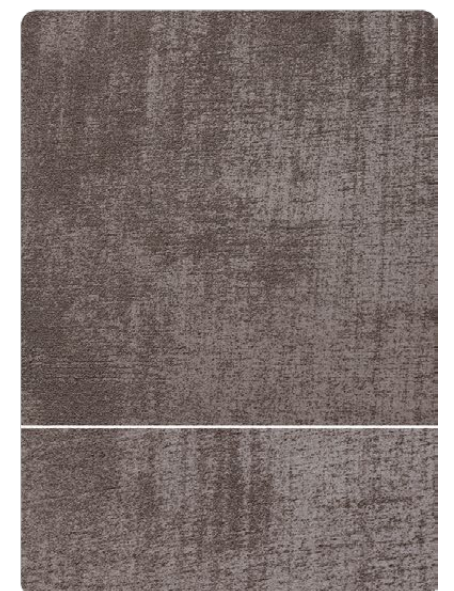

**SMM-814** Dark Rust



SMM-814 Dark Rust



SMM-802 Vanilla White



SMM-811 Frost Grey

Strato® Merino

# Application Technique

Application Video



## Preparation:


- Cover the edges of surface that won't be painted by masking it with tape, paper or plastic.
- Clean up the wall surface to ensure it is free from dirt and dust.



## 1 Primer

Roll 2 layers of primer on the entire surface. Allow 30 minutes to dry between the layers.  
(The primer can be diluted with maximum 3% of clean water)

**Tool:** Roller



## 2 Sanding (Optional)

Sand surface with sandpaper (600 grit) to ensure a smooth surface.

**Tool:** 600 Grit Sand Paper



## 3 Texture Coat

### Texture Coat (First Layer)

First, brush texture coat horizontally on the surface. Let dry for 30 - 40 minutes.



### Texture Coat (Second Layer)

Next, brush texture coat vertically on the surface. Let dry for 30 - 40 minutes.

(Do Not Dilute)

**Tool:** Brush

## IMPORTANT:

Color may vary on application technique & amount of material used.

## Dilution Guide:

Primer : Max 3% of clean water.  
Texture : Do not dilute.




## Packing Data

|     |              |
|-----|--------------|
| 1 L | Primer       |
| 1 L | Texture Coat |

## Coverage (per set)

|         |               |
|---------|---------------|
| WALL    | 3 - 4 sqm     |
| CEILING | 2.5 - 3.5 sqm |

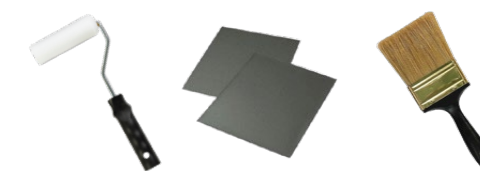

**Tools:** Roller, Sand Paper (600 Grit) & Brush



# STRATO® METALLICS

## Organza



# SMO



SMO 701 – 717

A smooth textured pattern with rich and creamy metallic finish that is suitable for all interior designs.

### Appearance

|                |  |  |  |  |  |               |
|----------------|--|--|--|--|--|---------------|
| Low Sheen      |  |  |  |  |  | High Sheen    |
| Smooth Texture |  |  |  |  |  | Rough Texture |
| Matte          |  |  |  |  |  | Metallic      |

### Features

- Interior use only



Low VOC  
& Odor



Green Choice, Water  
Based & Eco-friendly



Formaldehyde  
& Lead Free



Easy Application  
& DIY Friendly



Applicable  
on Ceiling



Easy to  
Touch Up



Easy  
Maintenance



Metallic  
Finish

Complies to the

- American California Proposition 65
- LEED, U.S. Green Building Council Standards



**SMO-701** Floral Beige



**SMO-702** Sandy Beige



**SMO-703** Lotus Blossom



**SMO-704** Lavender



**SMO-705** Space Grey



**SMO-706** Pewter Grey



**SMO-707** Blue Ash



**SMO-708** Antique Blue



All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tonne differences.

**We highly recommend seeing actual samples before ordering.**



**SMO-703** Lotus Blossom





**SMO-705** Space Grey

**SMO-702** Sandy Beige




All color shown are as close to the actual Suzuka® Strato® colors as modern printing techniques permit, nonetheless, there are still color/tone differences.

**We highly recommend seeing actual samples before ordering.**



**SMO-709** Lava Grey

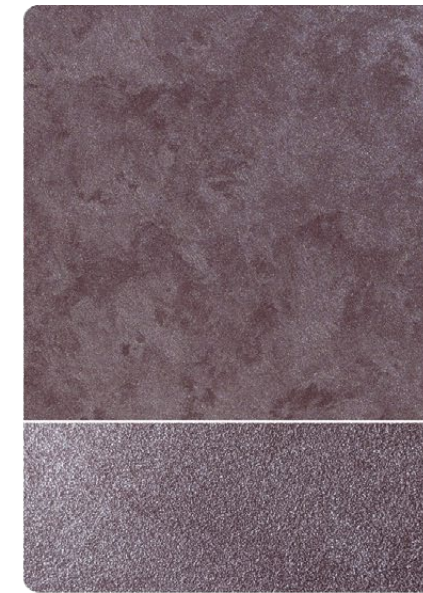

**SMO-710** Plum Violet




**SMO-711** Dark Amber



**SMO-712** Antique Wood



**SMO-713** Pale Mustard

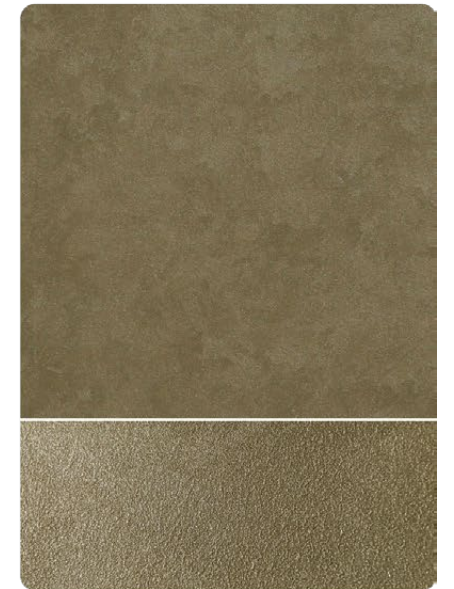

**SMO-714** Olive Garden



**SMO-715** Seal Grey



**SMO-716** Fossil Grey



**SMO-717** Sage Green



SMO-715 Seal Grey



SMO-713 Pale Mustard

SMO-714 Olive Garden

Strato® Organza

# Application Technique

Application Video



Preparation:

- Cover the edges of surface that won't be painted by masking it with tape, paper or plastic.
- Clean up the wall surface to ensure it is free from dirt and dust.

**IMPORTANT:**

Color may vary on application technique & amount of material used.

**Dilution Guide:**

Primer : Max 3% of clean water.  
Texture : Do not dilute.



**Tools:** Roller, Sand Paper (600 Grit) Trowel & Piccolo Tool



## 1 Primer

Roll 2 layers of primer on the entire surface. Allow 30 minutes to dry between the layers.  
(The primer can be diluted with maximum 3% of clean water)

**Tool:** Roller



## 2 Sanding

Sand surface with sandpaper (600 grit) to ensure a smooth surface.

**Tool:** 600 Grit Sand Paper

Texture Coat Options



## 3A Texture Coat Piccolo Pattern

**Texture Coat (First Layer)**

- (1) scrape texture coat evenly on the surface.
- (2) Use piccolo tool to create texture effects by moving with random motion. Let dry for 30 to 40 minutes.

**Texture Coat (Second Layer)**

Repeat the steps for a second layer of texture coat. Let dry for 30 to 40 minutes.  
(Do Not Dilute)

**Tool:** Trowel & Piccolo Tool



Piccolo Pattern



## 3B Texture Coat Trowel Pattern


**Texture Coat (First Layer)**

Scrape texture coat evenly on the surface. Let dry for 30 to 40 minutes.

**Texture Coat (Second Layer)**

Scrape texture coat randomly on the surface to create texture. Let dry for 30 to 40 minutes.  
(Do Not Dilute)

**Tool:** Trowel

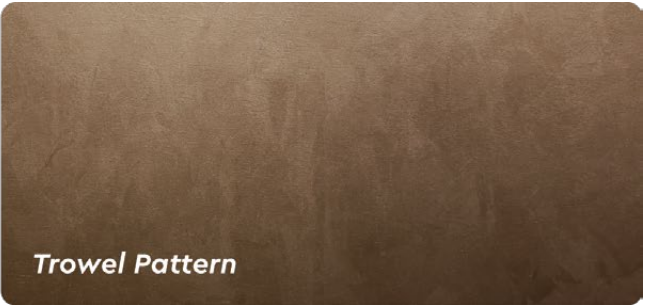

Trowel Pattern



# Packing Data

|     |              |
|-----|--------------|
| 1 L | Primer       |
| 1 L | Texture Coat |

\* Piccolo tool is sold separately

**Coverage** (per set)

|         |           |
|---------|-----------|
| WALL    | 6 - 7 sqm |
| CEILING | 5 - 6 sqm |